

# FLOOR PLAN NOTES

- PROVIDE CUSTOM TILE SHOWER WITH GLASS ENCLOSURE \$ DOOR. SLOPE FLOOR TO DRAIN. TILE \$ FIXTURES SELECTED BY OWNER.
- LOCATION FOR CLOTHES DRYER. PROVIDE 220V POWER, GAS STUB, COMBUSTION AIR, \$ VENTING TO EXTERIOR OF HOME.
- 3 LOCATION FOR CLOTHES WASHER. PROVIDE 110V POWER, HOT & COLD WATER, & DRAIN.
- PROVIDE UNDERCOUNTER DISHWASHER. STYLE & COLOR BY OWNER. PROVIDE WATER, POWER, & DRAIN.
- LOCATION OF REFRIDGERATOR/FREEZER AS SELECTED BY OWNER. PROVIDE WATERSTUB \$ 1 1 OV POWER.
- 6 LOCATION OF 50 GAL GAS WATER HEATER PROVIDE GAS STUB, WATER, DRAIN, SEISMIC RESTRAINTS, OVERFLOW PROTECTION, \$ 18" PLATFORM.
- 7 LOCATION OF AC CONDENSING UNIT. PROVIDE 4" CONCRETE PAD, 220V POWER, \$ POWER DISCONNECT.
- 8 PROVIDE 20-MIN FIRE RATED, SELF-CLOSING DOOR BETWEEN GARAGE \$ HOME.
- 9 FLASH \$ CAULK ALL PENETRATIONS AT MECHANICAL ROOM \$ EXTERIOR WALLS
- LOCATION OF ELECTRICAL METER WITH UFER GROUND \$ DISCONNECT
- STAIRS TO HAVE MAXIMUM RISER HEIGHT OF 8 INCHES THE GREATEST RISER HEIGHT SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCH. THE MINIMUM TREAD DEPTH SHALL BE 9 INCHES. THE GREATEST TREAD DEPTH SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCH.
- PROVIDE GAURDRAIL PER DETAIL ON SHEET A4.1. STYLE AND MATERIAL AS SELECTED BY OWNER.
- 13 HEATING AND VENTILATION UNIT IN MECHANICAL ROOM. PROVIDE GAS, POWER, \$ COMBUSTION AIR FROM EXTERIOR OF HOME. SIZE DETERMINED BY HVAC CONTRACTOR.

BASEMENT FLOOR: MAIN FLOOR: 2ND FLOOR:

DECK:

TOTAL LIVING AREA 8,334 SF GARAGE:

# CONSTRUCTION SPECIFICATIONS

BUILDING AREA

2,779 SF

2,847 SF

EXTERIOR WALLS TO BE FRAMED W/ 2X6 WOOD STUDS @ 16" O.C. UNLESS NOTED OHERWISE. PROVIDE PRESSURE TREATED SOLE PLATE \$ CONT. DOUBLE TOP PLATE. PROVIDE MIN R-19 FIBERGLASS BATT INSULATION. PROVIDE I" EXPANDED POLYSTYRENE FOAM BOARD INSULATION UNDER STUCCO. PROVIDE SHEATHING ON ENTIRE HOME. THICKNESS PER STRUCTURAL ENGINEERS SPECS. PROVIDE MIN R-39 BLOW-IN INSULATION IN ATTIC. PROVIDE SHEATHING OVER ROOF FRAMING. THICKNESS PER STRUCTURAL ENGINEER'S SPECIFICATIONS. PROVIDE MIN 1/2" GYP BOARD @ INTERIOR OF EXTERIOR WALLS.

ALL INTERIOR WALLS TO BE FRAMED W/ 2X4 WOOD STUDS @ 16" O.C. PROVIDE PT SOLE PLATE & CONT DOUBLE TOP PLATE. PROVIDE 1/2" GYP BOARD @ BOTH SIDES OF WALL.

ALL GLASS @ SHOWER \$ TUB ENCLOSURES MUST BE TEMPERED.

ALL GLASS IN DOORS MUST BE TEMPERED.

ALL WINDOWS WITHIN A 24" ARC OF A CLOSED DOOR W/ ANY POINT LESS THAN 60" AFF MUST BE TEMPERED.

ALL WINDOWS LESS THAN 60" AFF WITHIN 35" OF A STAIRWAY OR LANDING & WITHIN 60" OF SHOWER, TUB, ETC MUST BE TEMPERED.

ALL HOSE-BIBS TO BE EQUIPPED w/ FREEZING & BACKFLOW PREVENTION DEVICES.




1065 N Canyon St. Hildale, Utah 84784 tel: (435) 574-7749 em: laytonventuresllc@gmail.com

**Document Date:** June 1, 2016

Document Phase: Schematic Documents

rev. date remark 1 07/01/16 plan revision X

2nd Floor

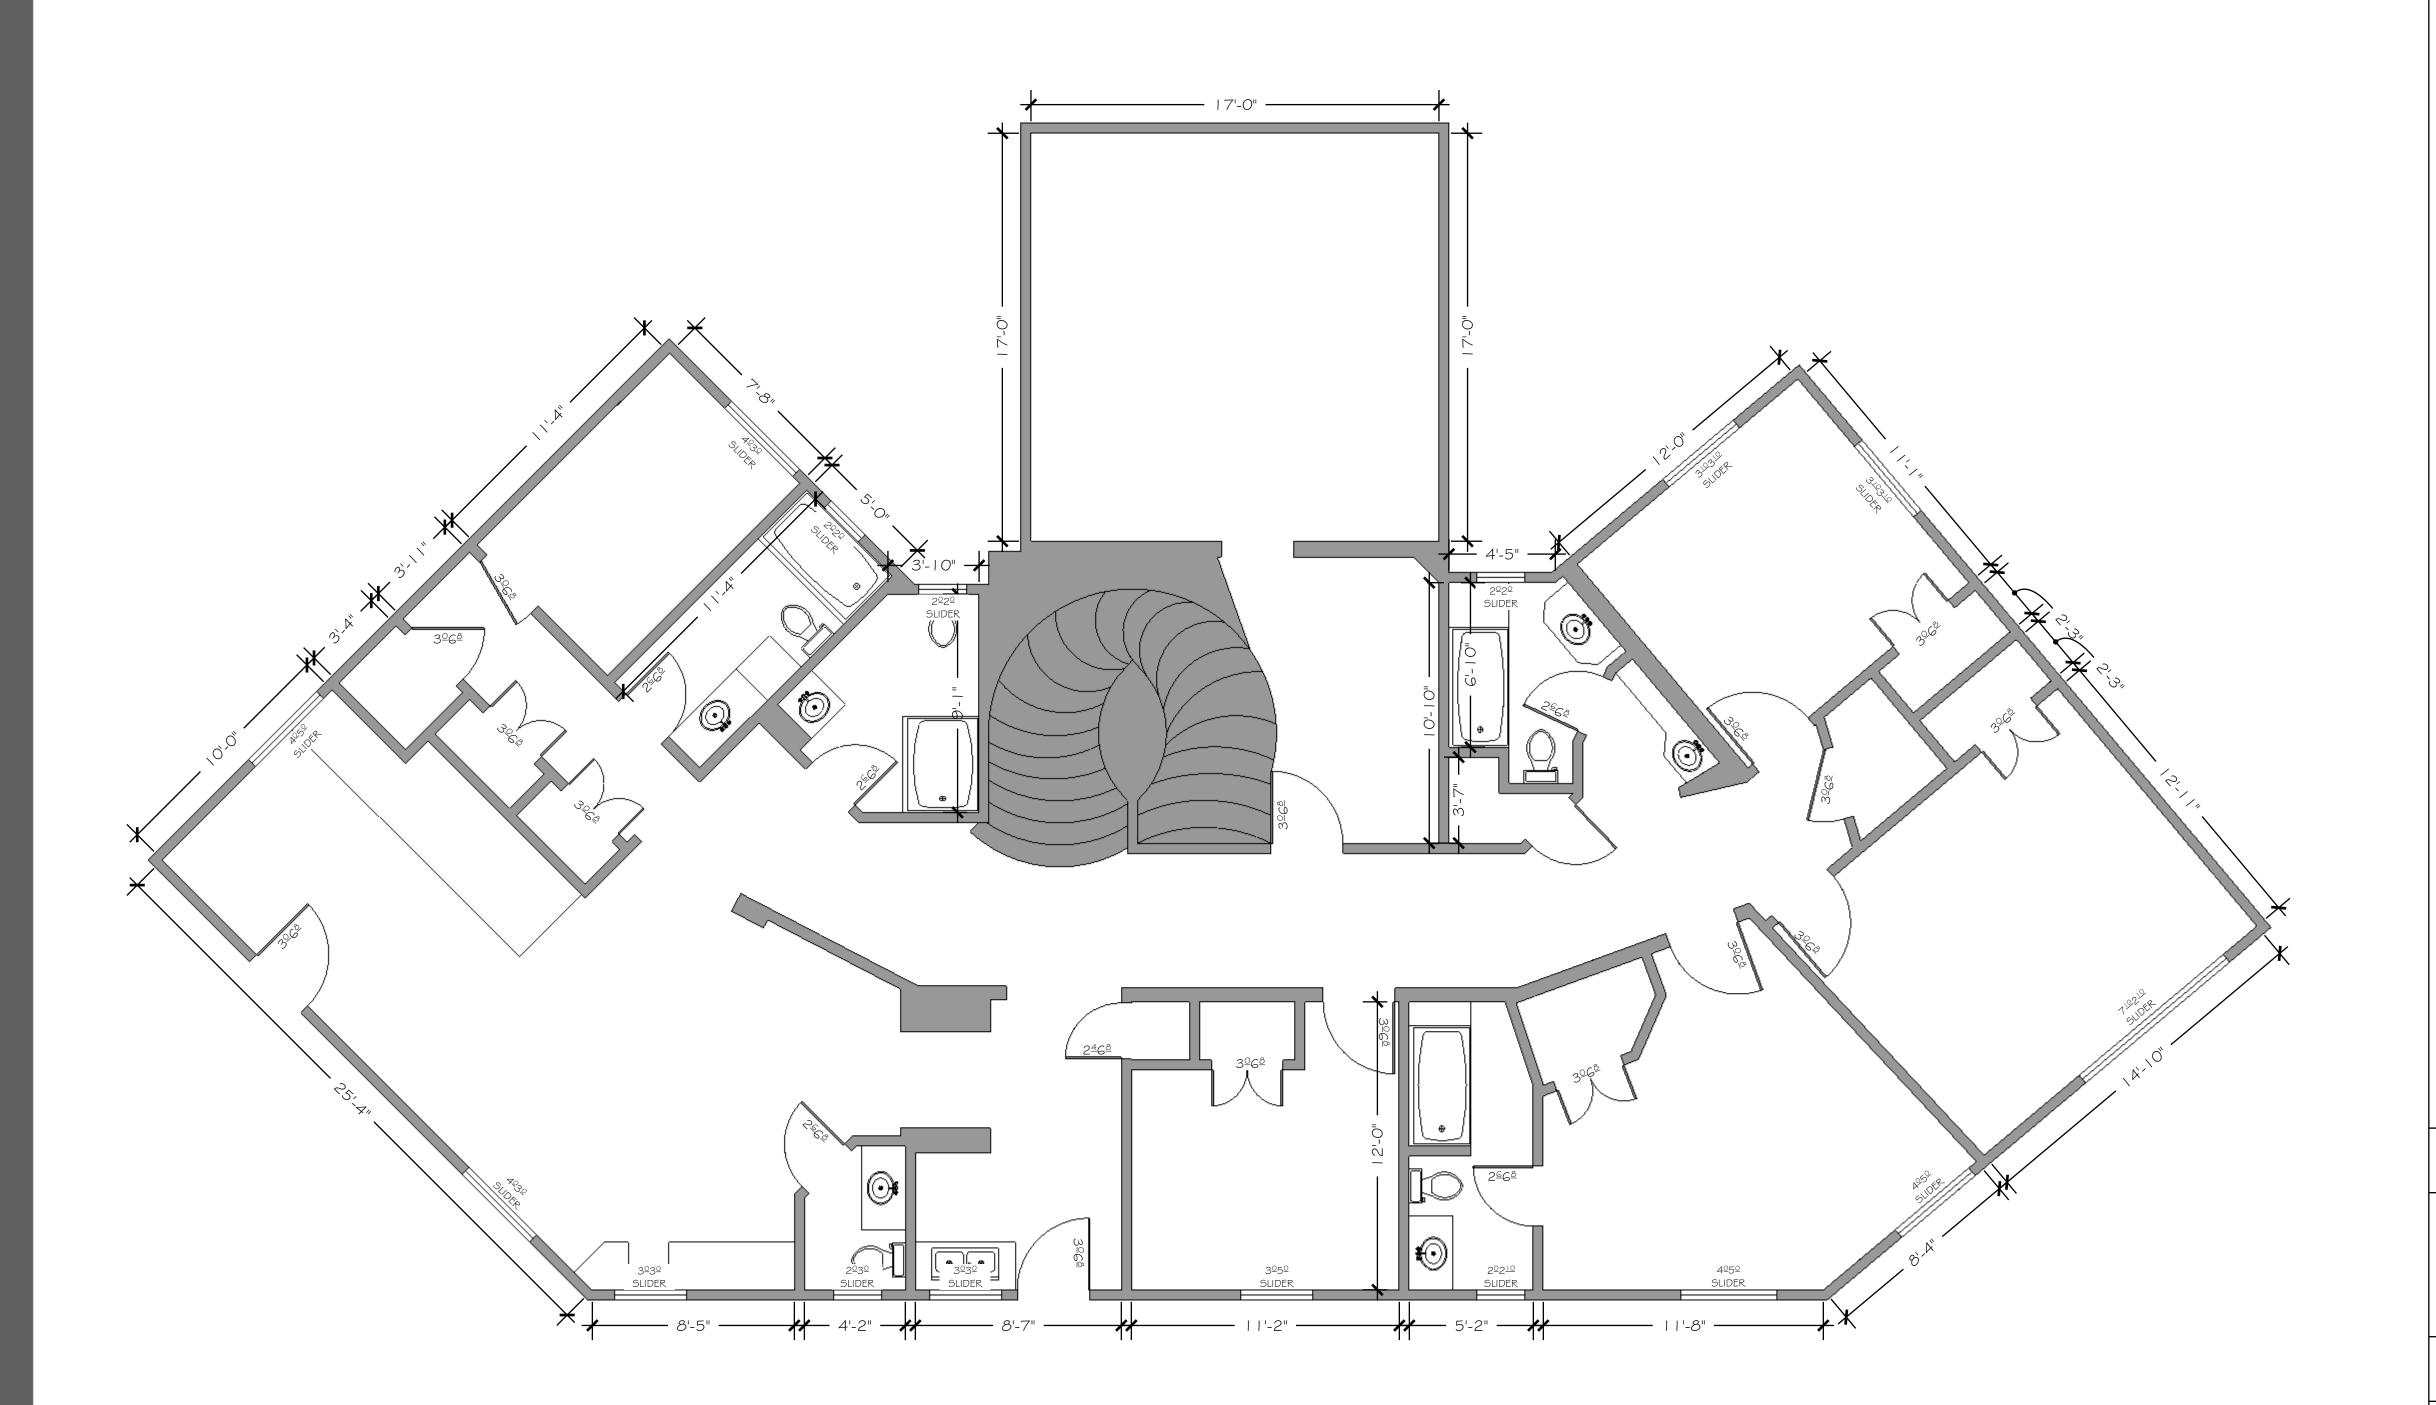



# FLOOR PLAN NOTES

- PROVIDE CUSTOM TILE SHOWER WITH GLASS ENCLOSURE \$ DOOR. SLOPE FLOOR TO DRAIN. TILE \$ FIXTURES SELECTED BY OWNER.
- 2 LOCATION FOR CLOTHES DRYER. PROVIDE 220V POWER, GAS STUB, COMBUSTION AIR, \$ VENTING TO EXTERIOR OF HOME.
- AIR, \$ VENTING TO EXTERIOR OF HOME.
- 3 LOCATION FOR CLOTHES WASHER. PROVIDE I I OV POWER, HOT & COLD WATER, & DRAIN.
- PROVIDE UNDERCOUNTER DISHWASHER. STYLE \$ COLOR BY OWNER. PROVIDE WATER, POWER, \$ DRAIN.
- LOCATION OF REFRIDGERATOR/FREEZER AS SELECTED BY OWNER. PROVIDE WATERSTUB \$ 1 1 OV POWER.
- 6 LOCATION OF 50 GAL GAS WATER HEATER PROVIDE GAS STUB, WATER, DRAIN, SEISMIC RESTRAINTS, OVERFLOW PROTECTION, \$ 1.8" PLATFORM.
- 7 LOCATION OF AC CONDENSING UNIT. PROVIDE 4" CONCRETE PAD, 220V POWER, \$ POWER DISCONNECT.
- 8 PROVIDE 20-MIN FIRE RATED, SELF-CLOSING DOOR BETWEEN GARAGE \$ HOME.
- 9 FLASH \$ CAULK ALL PENETRATIONS AT MECHANICAL ROOM \$ EXTERIOR WALLS
- 10 LOCATION OF ELECTRICAL METER WITH UFER GROUND \$ DISCONNECT
- STAIRS TO HAVE MAXIMUM RISER HEIGHT OF 8 INCHES THE GREATEST RISER HEIGHT SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCH. THE MINIMUM TREAD DEPTH SHALL BE 9 INCHES. THE GREATEST TREAD DEPTH SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCH.
- PROVIDE GAURDRAIL PER DETAIL ON SHEET A4.1. STYLE AND MATERIAL AS SELECTED BY OWNER.
- HEATING AND VENTILATION UNIT IN MECHANICAL ROOM. PROVIDE GAS, POWER, ¢ COMBUSTION AIR FROM EXTERIOR OF HOME. SIZE DETERMINED BY HVAC CONTRACTOR.

MAIN FLOOR: 1,799 SF 2ND FLOOR: 996 SF

TOTAL LIVING AREA 2,795 SF

GARAGE: N/A

DECK:

# CONSTRUCTION SPECIFICATIONS

BUILDING AREA

EXTERIOR WALLS TO BE FRAMED W/ 2XG WOOD STUDS @ 16" O.C. UNLESS NOTED OHERWISE. PROVIDE PRESSURE TREATED SOLE PLATE & CONT. DOUBLE TOP PLATE. PROVIDE MIN R-19 FIBERGLASS BATT INSULATION. PROVIDE I" EXPANDED POLYSTYRENE FOAM BOARD INSULATION UNDER STUCCO. PROVIDE SHEATHING ON ENTIRE HOME. THICKNESS PER STRUCTURAL ENGINEERS SPECS. PROVIDE MIN R-39 BLOW-IN INSULATION IN ATTIC. PROVIDE SHEATHING OVER ROOF FRAMING. THICKNESS PER STRUCTURAL ENGINEER'S SPECIFICATIONS. PROVIDE MIN 1/2" GYP BOARD @ INTERIOR OF EXTERIOR WALLS.

ALL INTERIOR WALLS TO BE FRAMED W/ 2X4 WOOD STUDS @ 16" O.C. PROVIDE PT SOLE PLATE & CONT DOUBLE TOP PLATE. PROVIDE 1/2" GYP BOARD @ BOTH SIDES OF WALL.

ALL GLASS @ SHOWER \$ TUB ENCLOSURES MUST BE TEMPERED.

ALL GLASS IN DOORS MUST BE TEMPERED.

ALL WINDOWS WITHIN A 24" ARC OF A CLOSED DOOR W/ ANY POINT LESS THAN 60" AFF MUST BE TEMPERED.

ALL WINDOWS LESS THAN 60" AFF WITHIN 35" OF A STAIRWAY OR LANDING & WITHIN 60" OF SHOWER, TUB, ETC MUST BE TEMPERED.

ALL HOSE-BIBS TO BE EQUIPPED w/ FREEZING \$ BACKFLOW PREVENTION DEVICES.



1065 N Canyon St. Hildale, Utah 84784 tel: (435) 574-7749 em: laytonventuresllc@gmail.com

# 340 W Harker


Document Phase: Schematic Documents

**Document Date:** 

June 1, 2016

rev. date remark
1 07/01/16 plan revision X

Basement Floor Plan

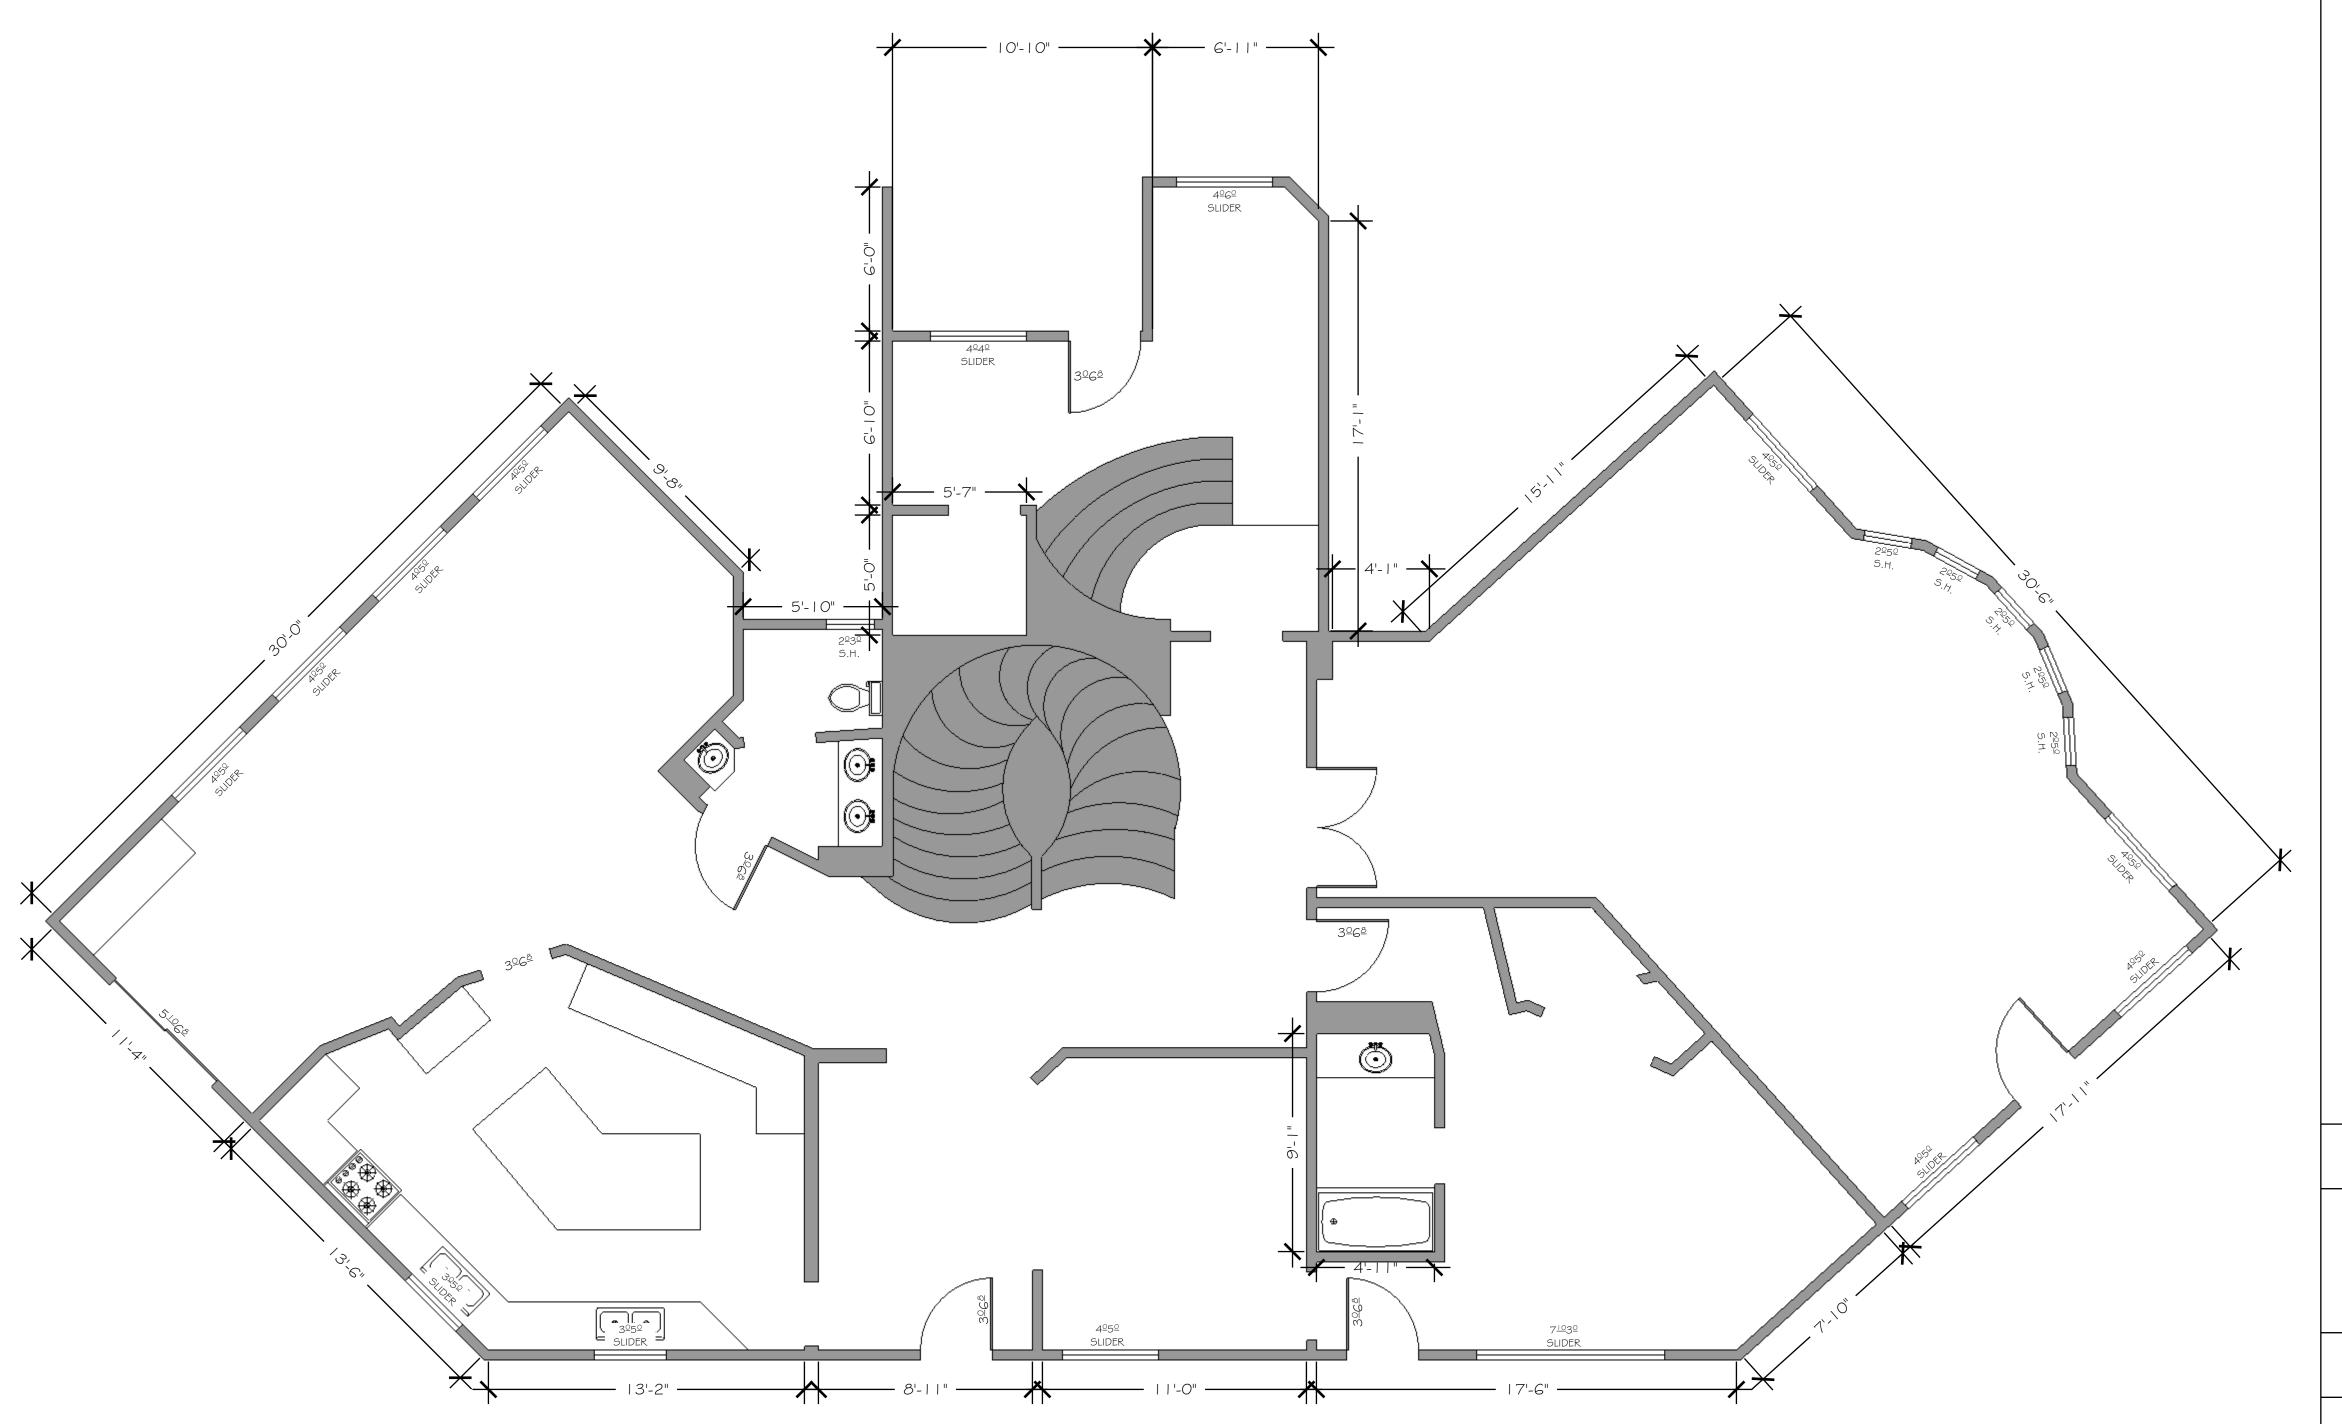



# FLOOR PLAN NOTES

- PROVIDE CUSTOM TILE SHOWER WITH GLASS ENCLOSURE \$ DOOR. SLOPE FLOOR TO DRAIN. TILE \$ FIXTURES SELECTED BY OWNER.
- 2 LOCATION FOR CLOTHES DRYER. PROVIDE 220V POWER, GAS STUB, COMBUSTION AIR, & VENTING TO EXTERIOR OF HOME.
- 3 LOCATION FOR CLOTHES WASHER. PROVIDE I I OV POWER, HOT & COLD WATER, & DRAIN.
- PROVIDE UNDERCOUNTER DISHWASHER. STYLE \$ COLOR BY OWNER. PROVIDE WATER, POWER, \$ DRAIN.
- LOCATION OF REFRIDGERATOR/FREEZER AS SELECTED BY OWNER. PROVIDE WATERSTUB \$ 1 1 OV POWER.
- 6 LOCATION OF 50 GAL GAS WATER HEATER PROVIDE GAS STUB, WATER, DRAIN, SEISMIC RESTRAINTS, OVERFLOW PROTECTION, \$ 18" PLATFORM.
- 7 LOCATION OF AC CONDENSING UNIT. PROVIDE 4" CONCRETE PAD, 220V POWER, \$ POWER DISCONNECT.
- 8 PROVIDE 20-MIN FIRE RATED, SELF-CLOSING DOOR BETWEEN GARAGE \$ HOME.
- 9 FLASH ¢ CAULK ALL PENETRATIONS AT MECHANICAL ROOM ¢ EXTERIOR WALLS
- LOCATION OF ELECTRICAL METER WITH UFER GROUND \$ DISCONNECT
- STAIRS TO HAVE MAXIMUM RISER HEIGHT OF 8 INCHES THE GREATEST RISER HEIGHT SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCH. THE MINIMUM TREAD DEPTH SHALL BE 9 INCHES. THE GREATEST TREAD DEPTH SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCH.
- PROVIDE GAURDRAIL PER DETAIL ON SHEET A4.1. STYLE AND MATERIAL AS SELECTED BY OWNER.
- 13 HEATING AND VENTILATION UNIT IN MECHANICAL ROOM. PROVIDE GAS, POWER, \$ COMBUSTION AIR FROM EXTERIOR OF HOME. SIZE DETERMINED BY HVAC CONTRACTOR.

# BUILDING AREA

MAIN FLOOR: 1,799 SF 2ND FLOOR: 996 SF 2,795 SF TOTAL LIVING AREA GARAGE:

DECK:

# CONSTRUCTION SPECIFICATIONS

EXTERIOR WALLS TO BE FRAMED W/ 2X6 WOOD STUDS @ 16" O.C. UNLESS NOTED OHERWISE. PROVIDE PRESSURE TREATED SOLE PLATE \$ CONT. DOUBLE TOP PLATE. PROVIDE MIN R-19 FIBERGLASS BATT INSULATION. PROVIDE I" EXPANDED POLYSTYRENE FOAM BOARD INSULATION UNDER STUCCO. PROVIDE SHEATHING ON ENTIRE HOME. THICKNESS PER STRUCTURAL ENGINEERS SPECS. PROVIDE MIN R-39 BLOW-IN INSULATION IN ATTIC. PROVIDE SHEATHING OVER ROOF FRAMING. THICKNESS PER STRUCTURAL ENGINEER'S SPECIFICATIONS. PROVIDE MIN 1/2" GYP BOARD @ INTERIOR OF EXTERIOR WALLS.

ALL INTERIOR WALLS TO BE FRAMED W/ 2X4 WOOD STUDS @ 16" O.C. PROVIDE PT SOLE PLATE & CONT DOUBLE TOP PLATE. PROVIDE 1/2" GYP BOARD @ BOTH SIDES OF WALL.

ALL GLASS @ SHOWER \$ TUB ENCLOSURES MUST BE TEMPERED.

ALL GLASS IN DOORS MUST BE TEMPERED.

ALL WINDOWS WITHIN A 24" ARC OF A CLOSED DOOR W/ ANY POINT LESS THAN 60" AFF MUST BE TEMPERED.

ALL WINDOWS LESS THAN 60" AFF WITHIN 35" OF A STAIRWAY OR LANDING & WITHIN 60" OF SHOWER, TUB, ETC MUST BE TEMPERED.

ALL HOSE-BIBS TO BE EQUIPPED w/ FREEZING & BACKFLOW PREVENTION DEVICES.



1065 N Canyon St. Hildale, Utah 84784 tel: (435) 574-7749 em: laytonventuresllc@gmail.com

**Document Date:** June 1, 2016

**Document Phase:** Schematic Documents

rev. date remark 1 07/01/16 plan revision X

Main Floor Plan



# 65 Uzona Ave

Document Date: June 1, 2016

Document Phase: Schematic Documents

rev. date remark
1 07/01/16 plan revision X

Photos











Document Date: June 1, 2016


Document Phase: Schematic Documents


rev. date remark
1 07/01/16 plan revision X





HINNEN IN



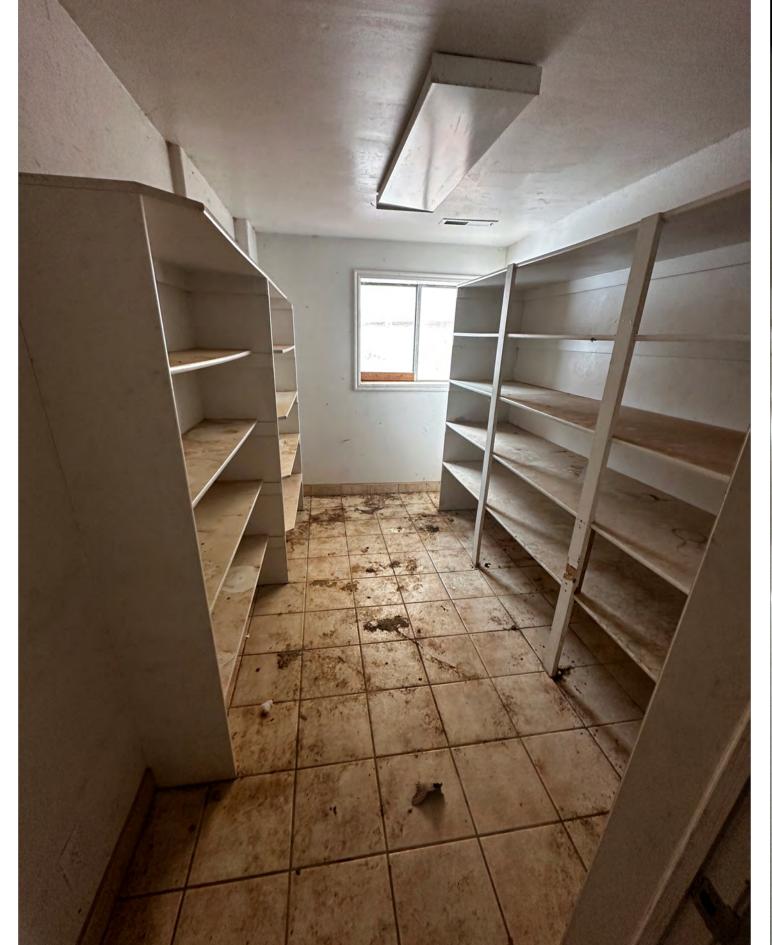

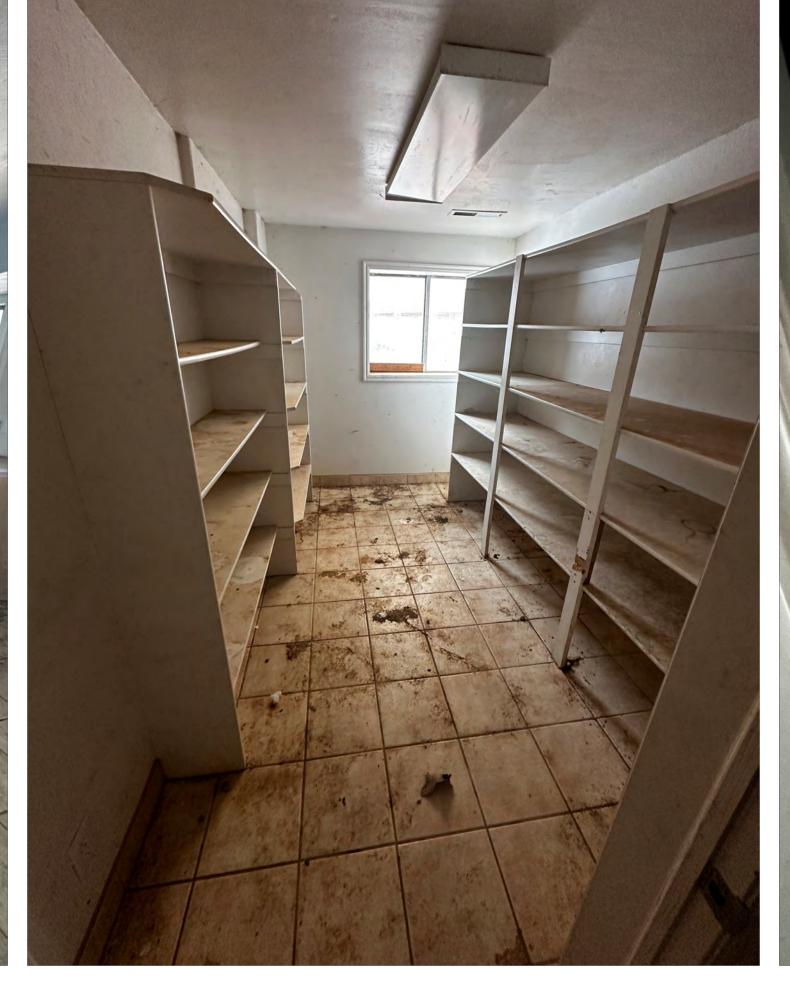


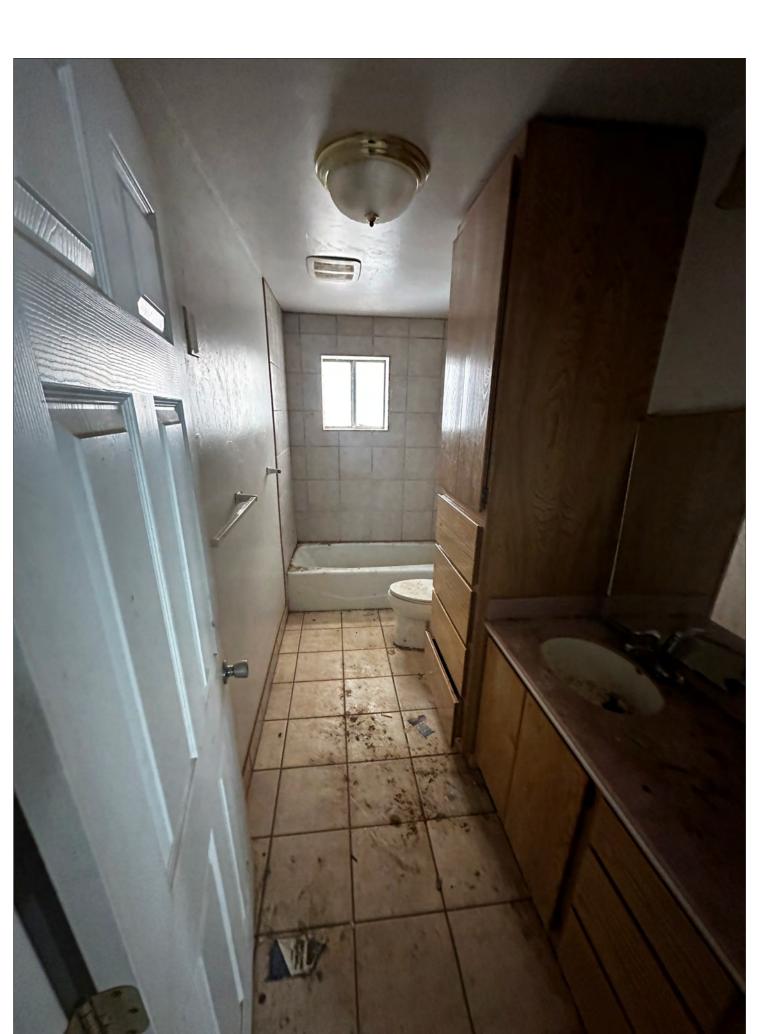

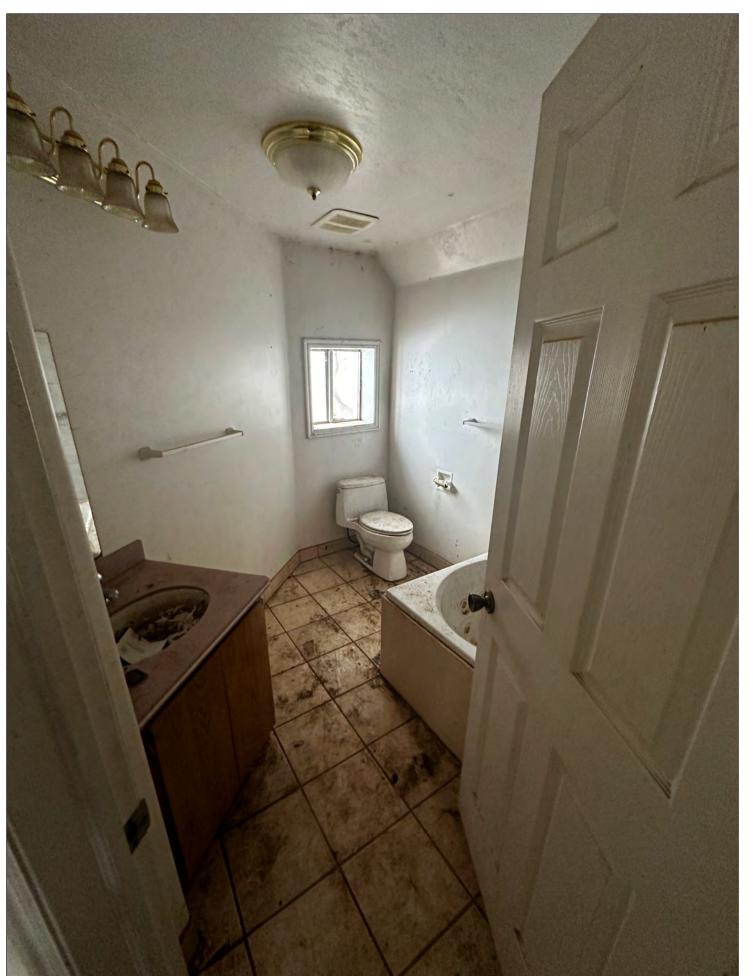





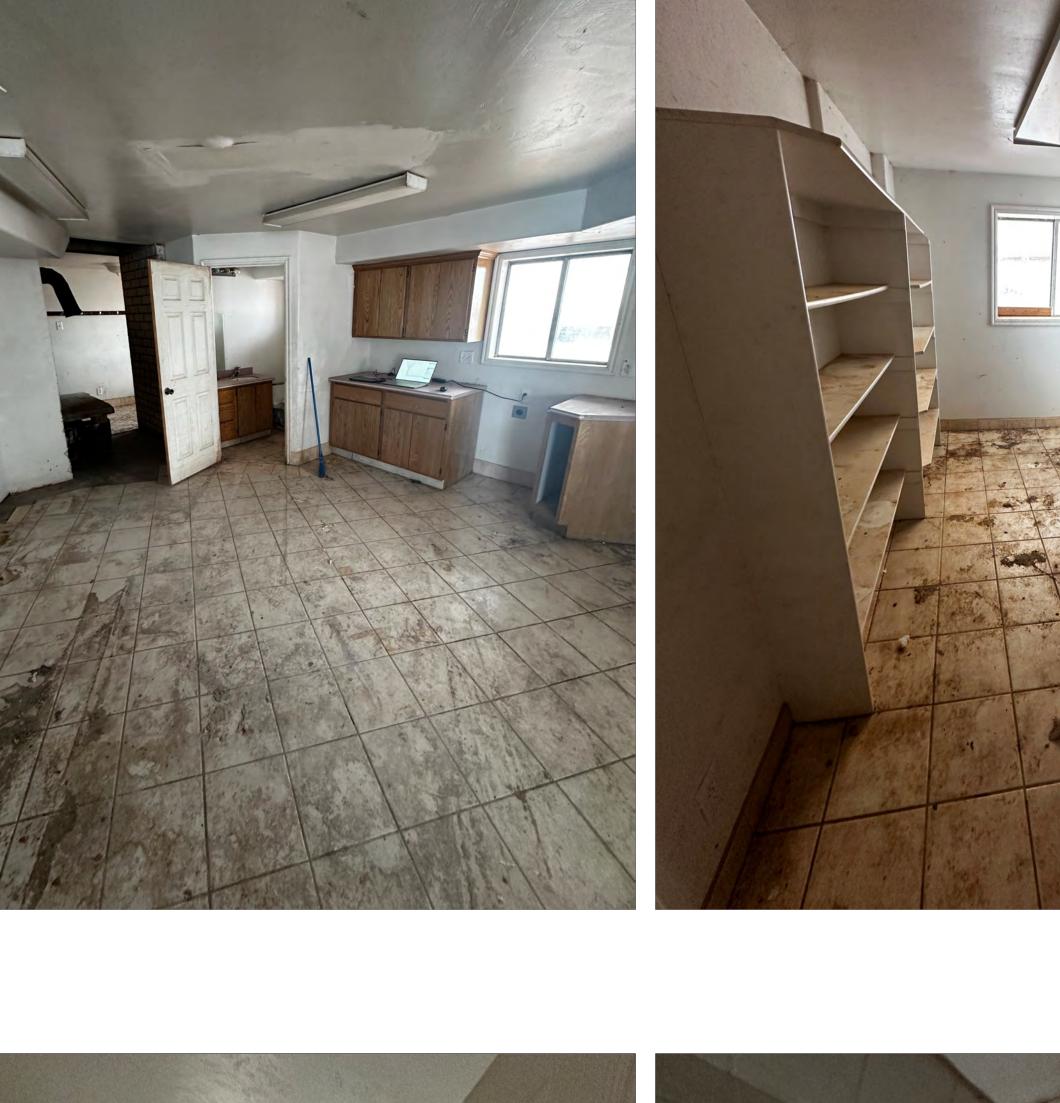








Document Phase:
Schematic Documents

rev. date remark
1 07/01/16 plan revision X



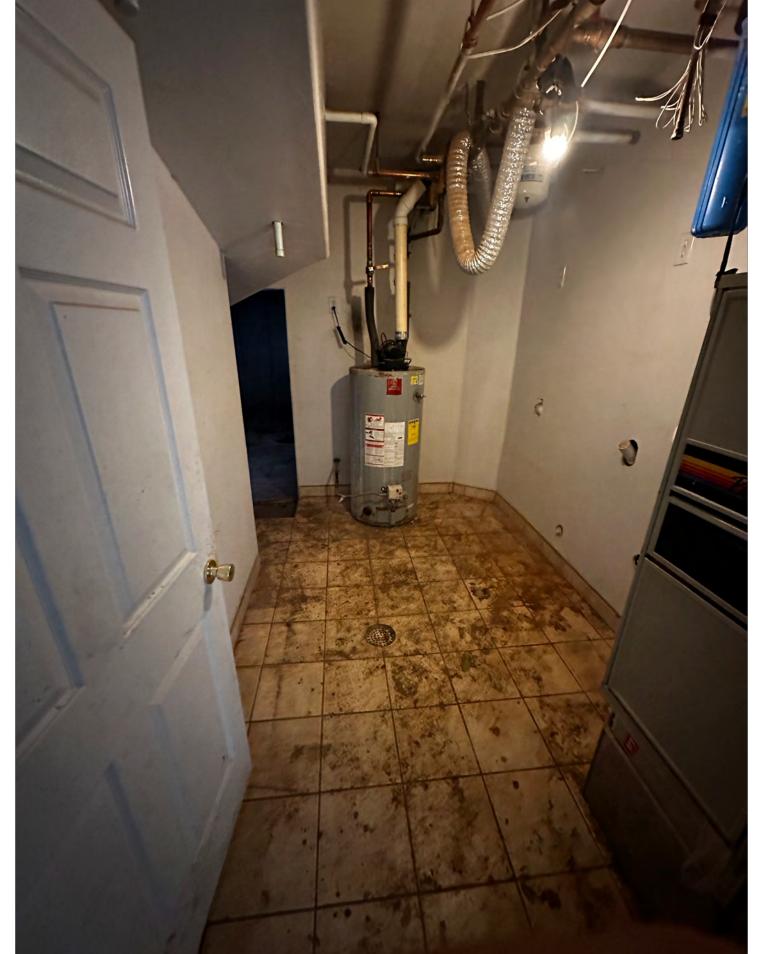

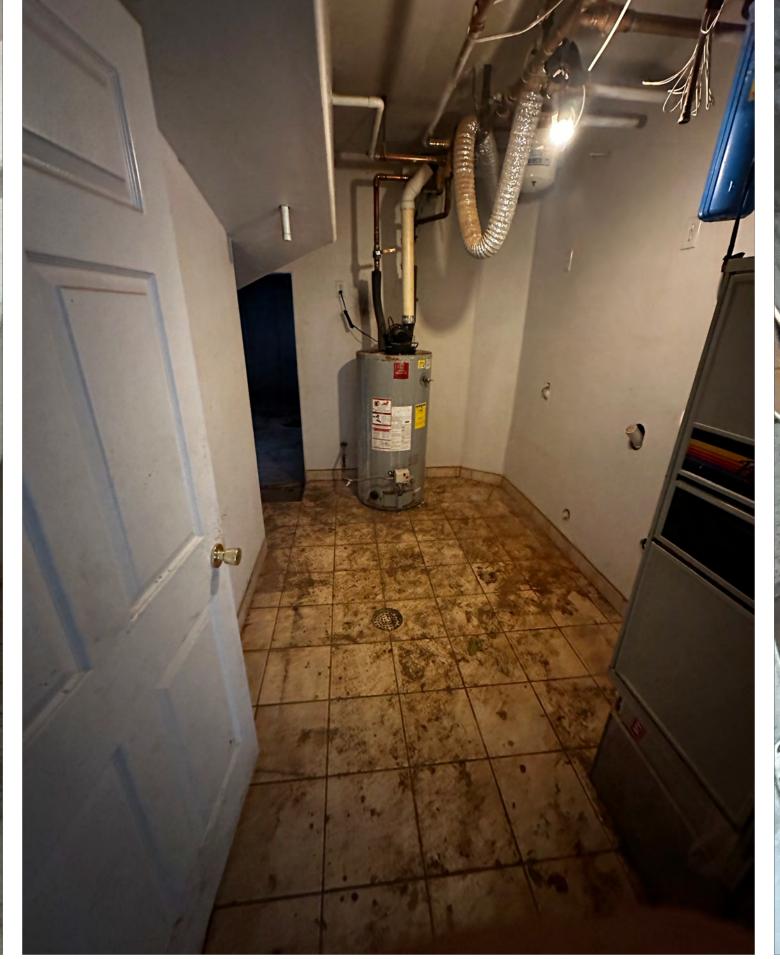

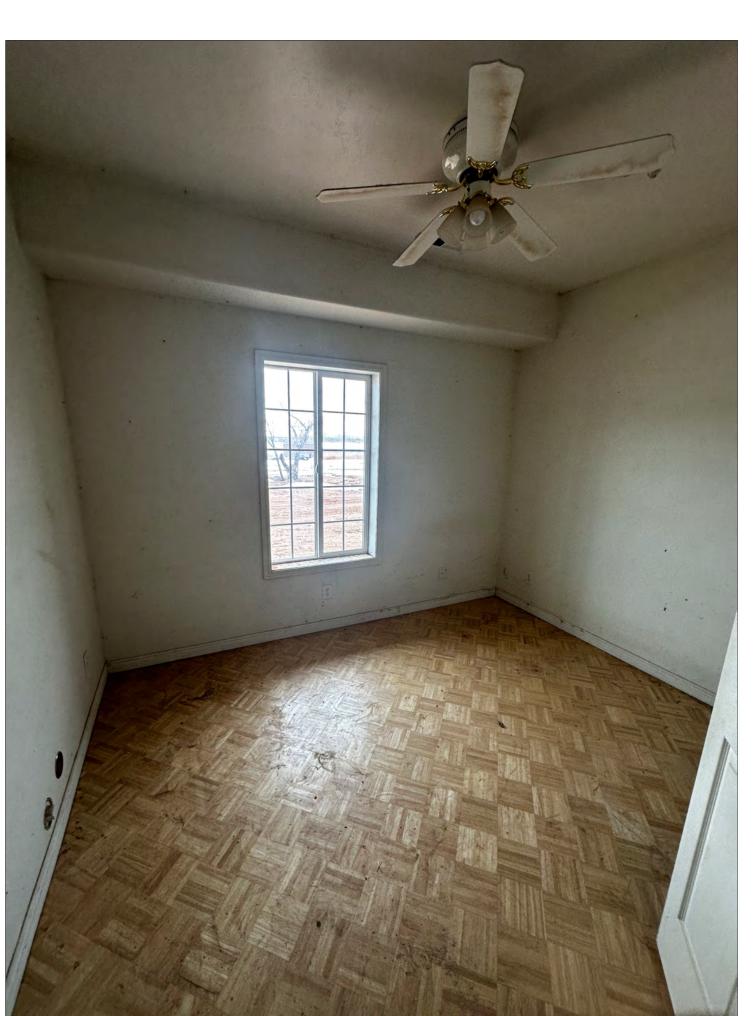







Photos



Document Date: June 1, 2016

Document Phase: Schematic Documents


rev. date remark
1 07/01/16 plan revision X



Photos






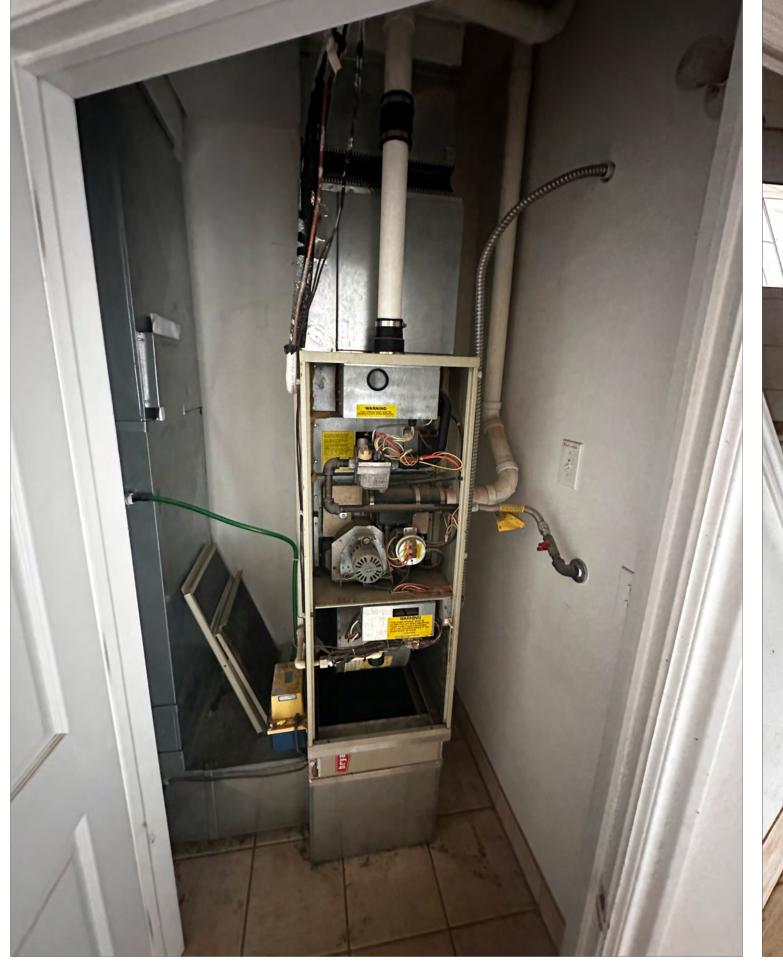





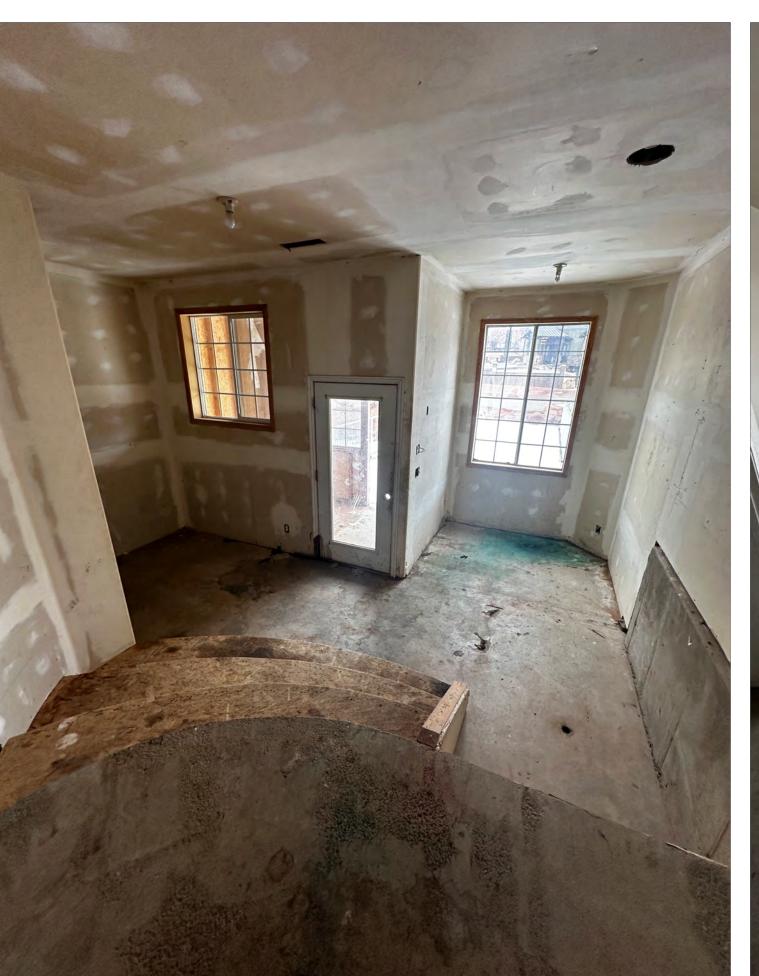







Document Date: June 1, 2016

Document Phase: Schematic Documents


rev. date remark
1 07/01/16 plan revision X










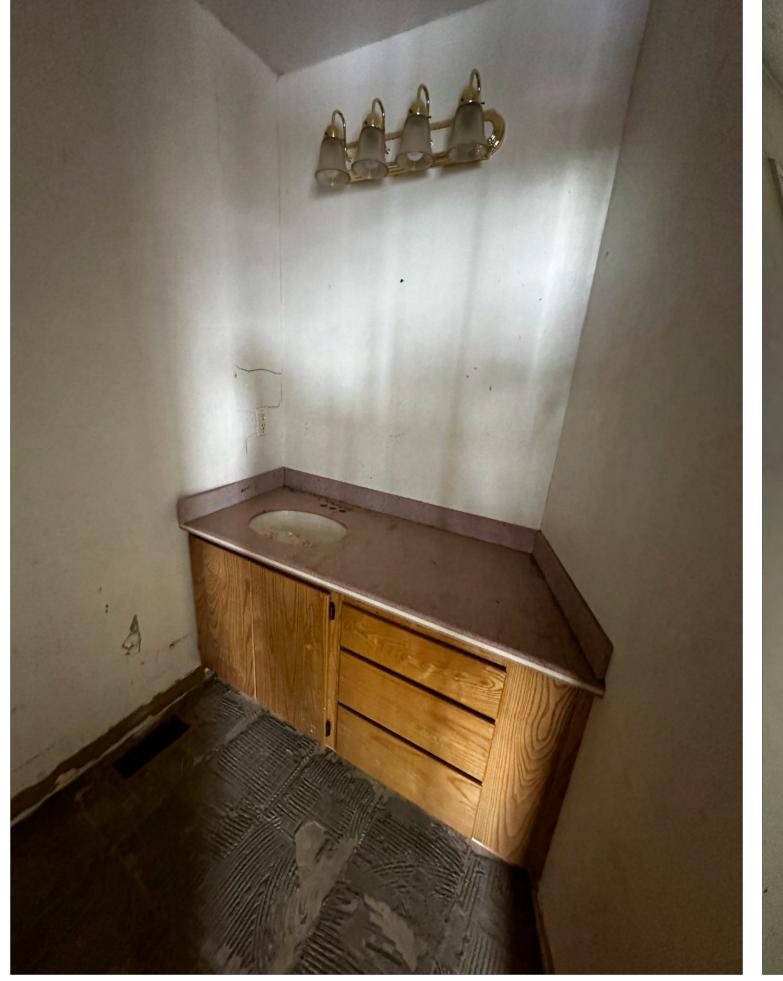





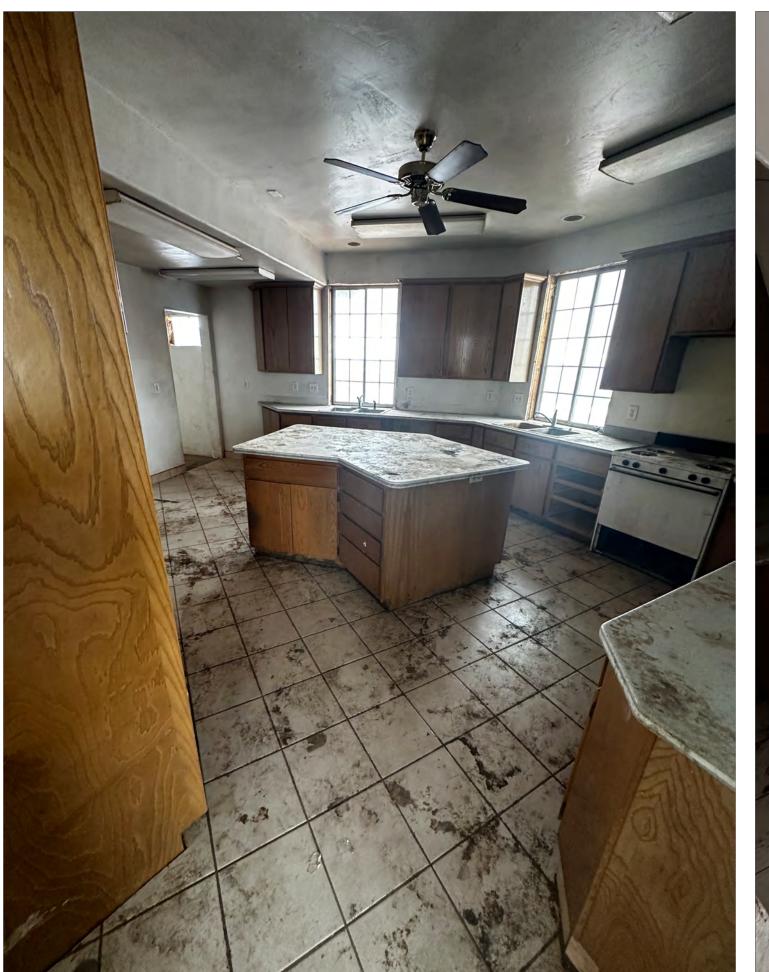



















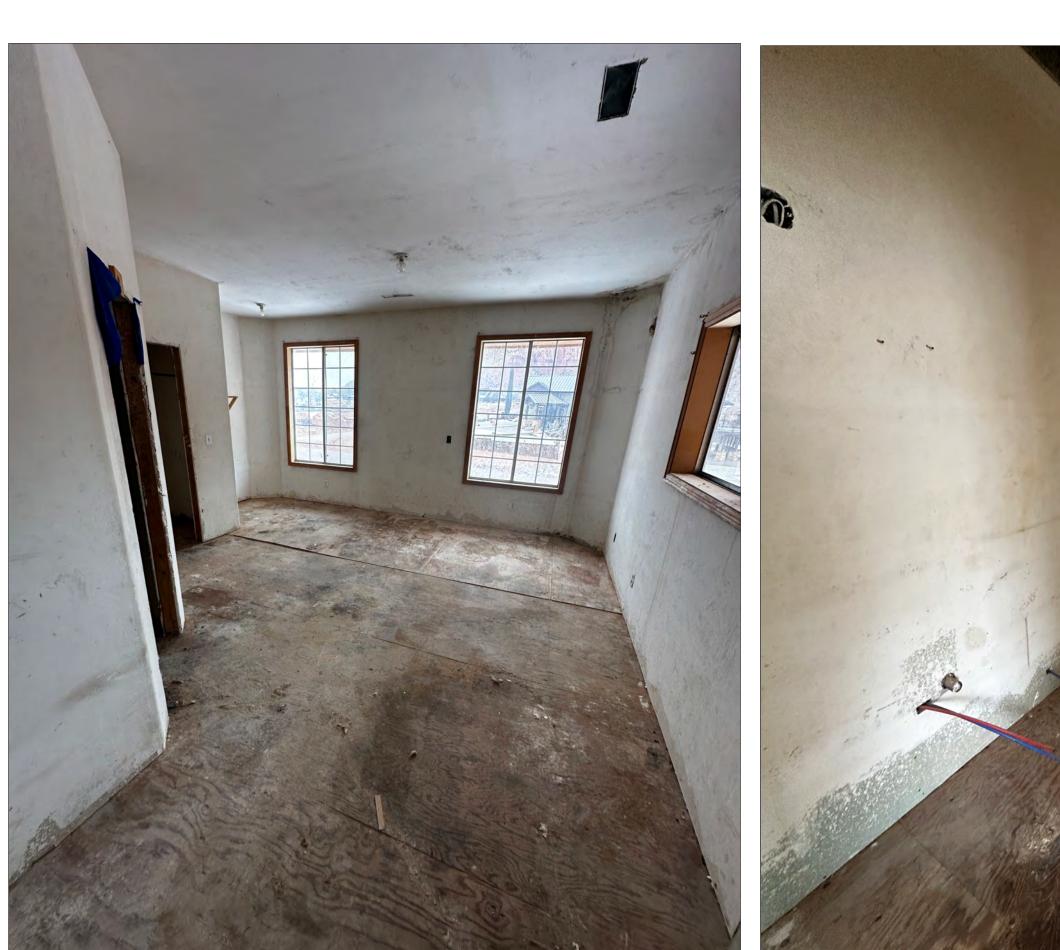

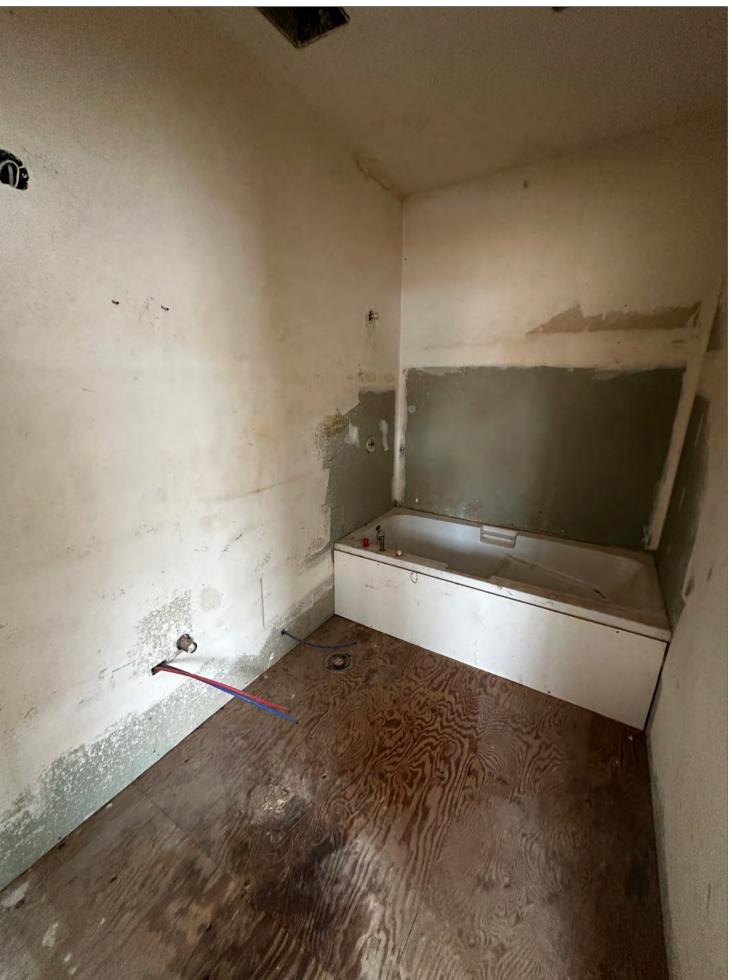

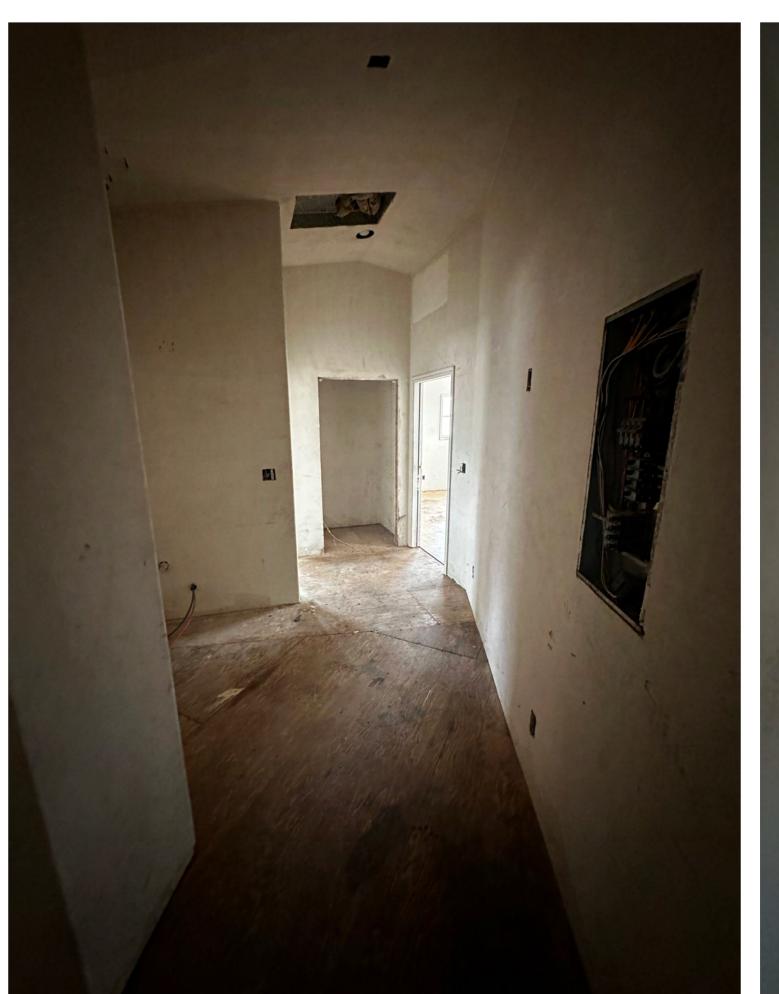

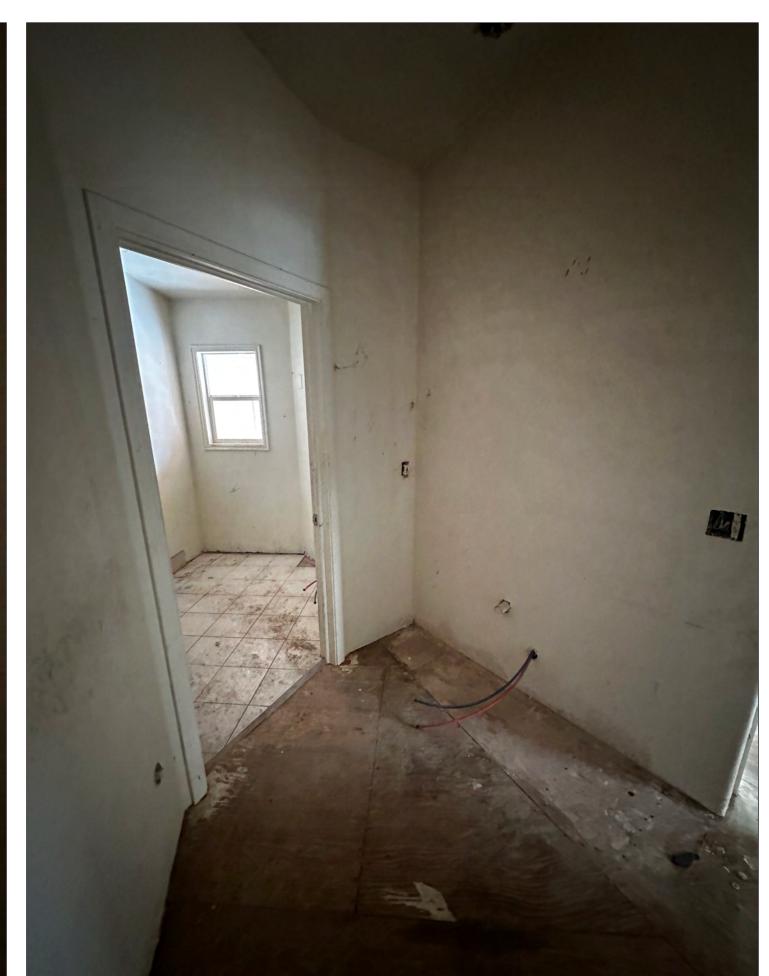

# 765 Uzona

Document Date: June 1, 2016

Document Phase: Schematic Documents

rev. date remark
1 07/01/16 plan revision X


Photos



Document Date: June 1, 2016

Document Phase: Schematic Documents

rev. date remark
1 07/01/16 plan revision X

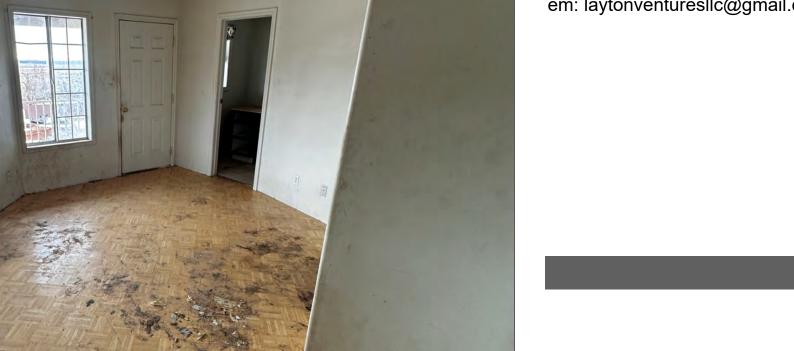











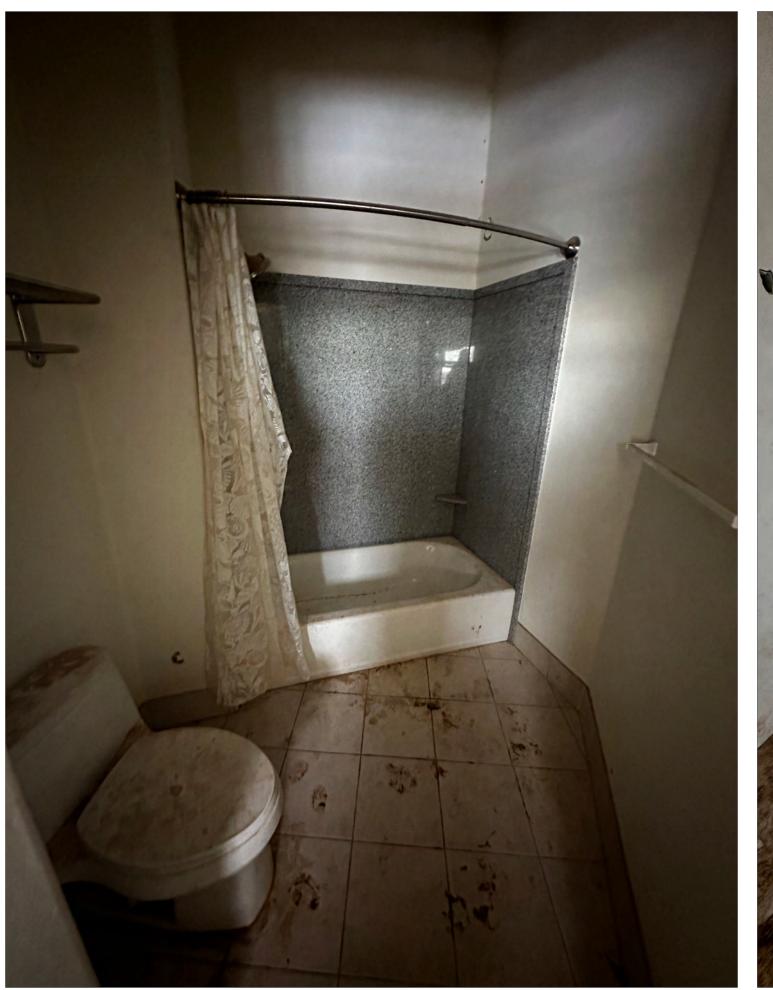

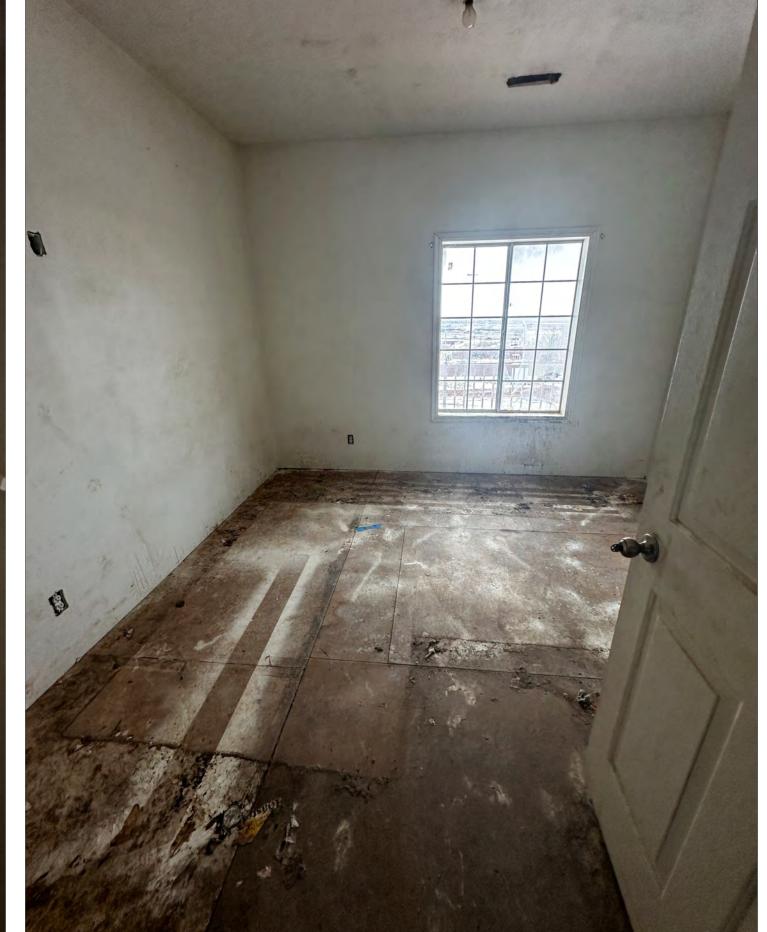

Photos







Document Date: June 1, 2016

Document Phase: Schematic Documents

rev. date remark
1 07/01/16 plan revision X

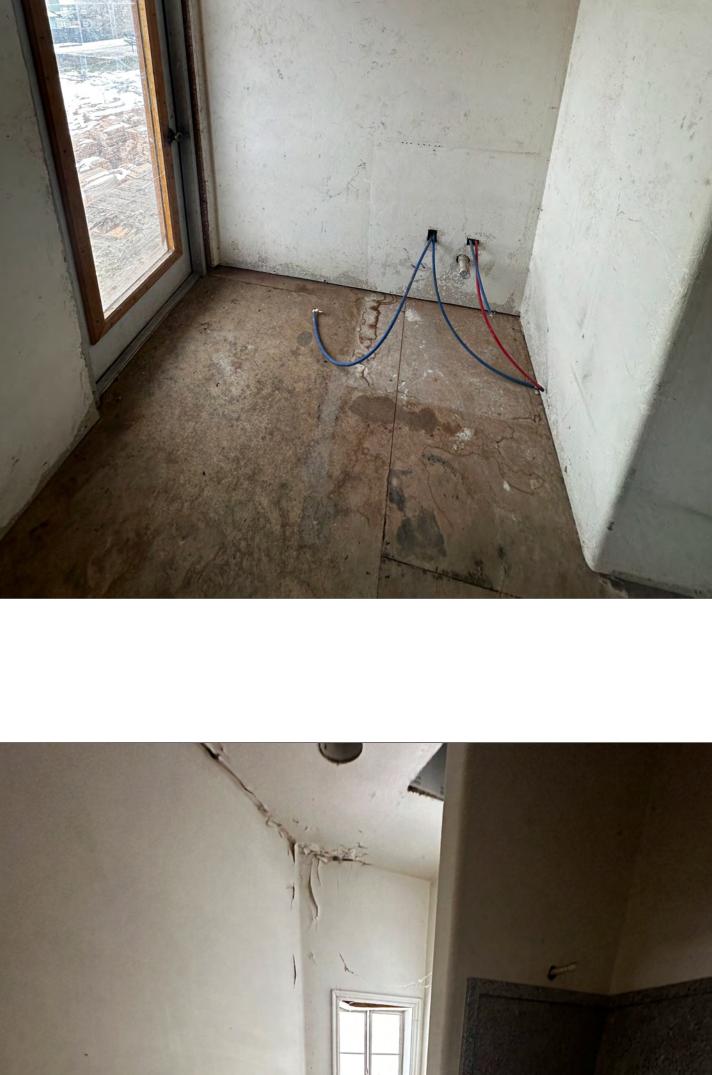




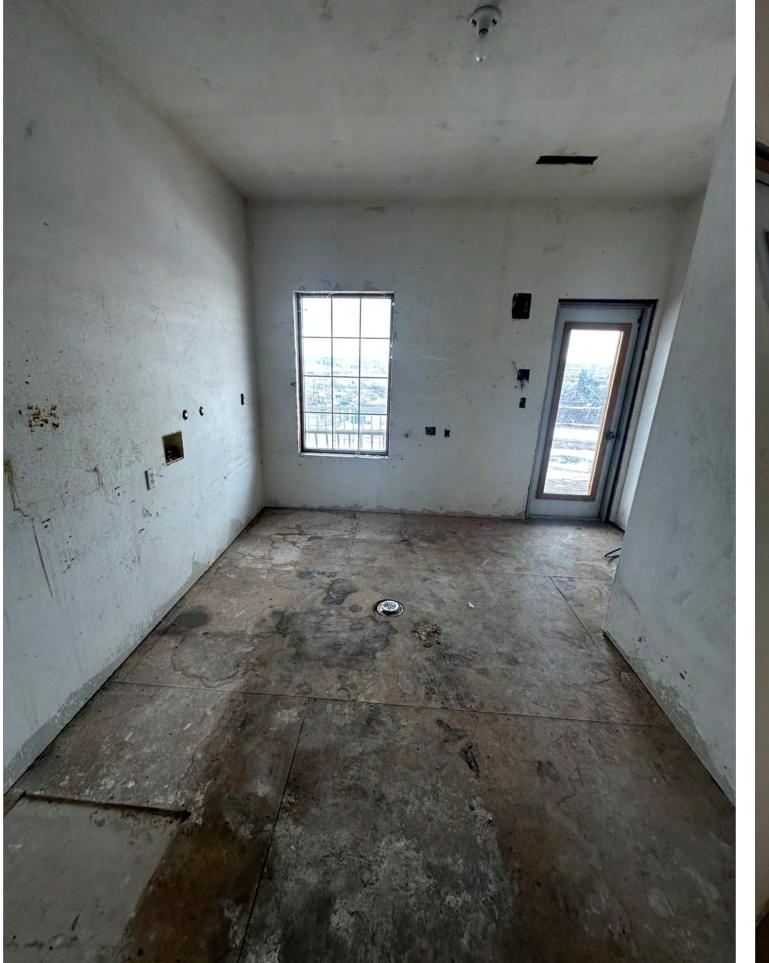







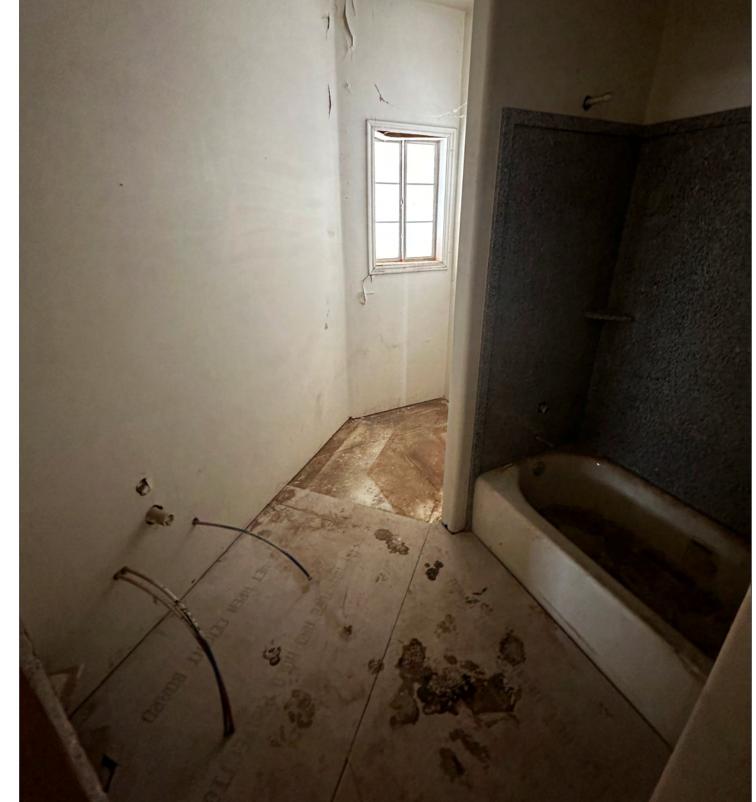

Photos





Document Date: June 1, 2016

Document Phase: Schematic Documents


rev. date remark
1 07/01/16 plan revision X









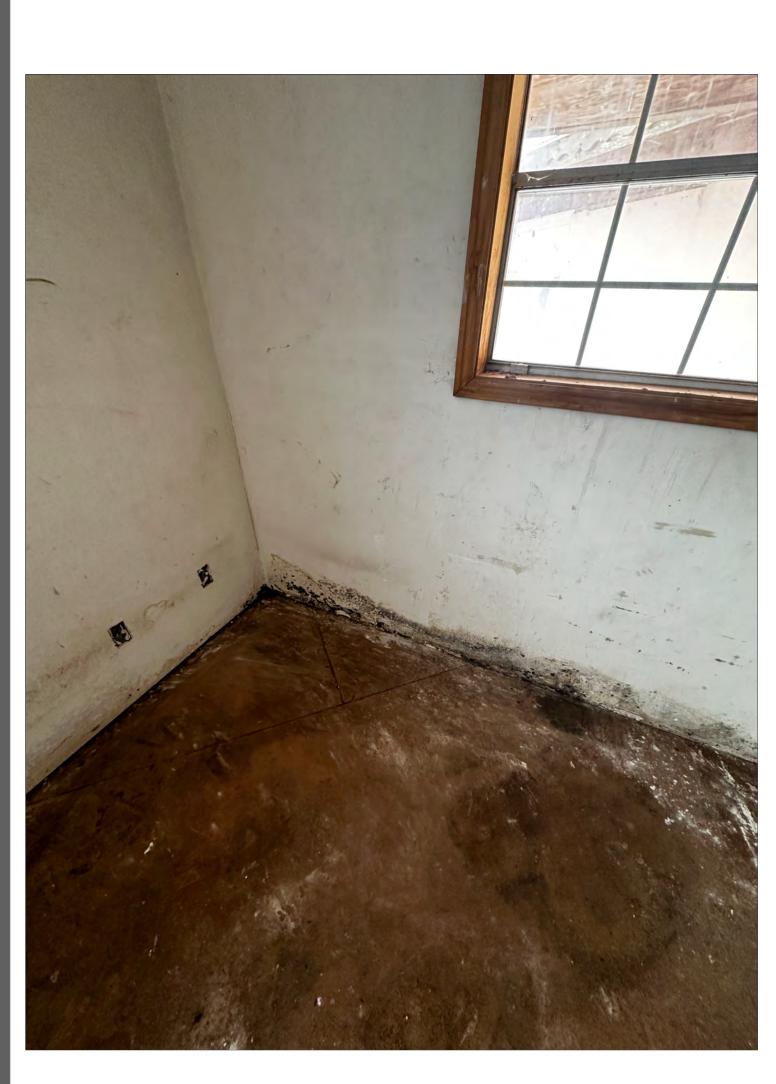







Photos